



REVISION RECORD MODIFICATIONS	DATE	REV.
NEW	2009/06/04	A/0

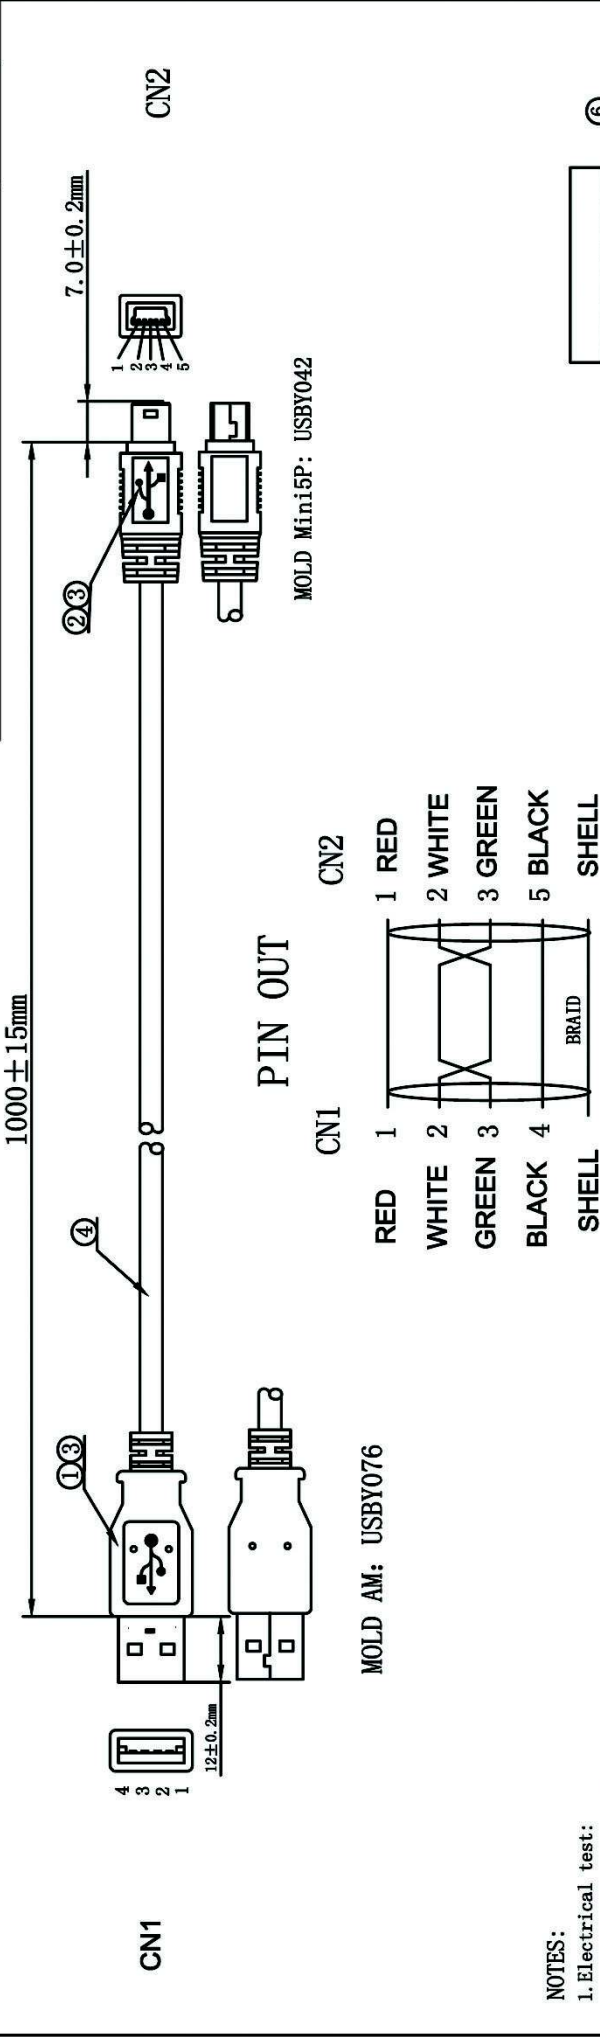


NOTES:

1. Electrical test:
  - (1). 100% open short & miss wire test;
  - (2). Insulation resistance: DC 300V 100mΩ min;
  - (3). Conductor resistance: 3 Ω Max;
2. ROHS compliant
3. MARKING: E258105 **AL**AWM STYLE 2725 80°C 30V VW-1 USB 2.0 High Speed Cable - RoHS
4. Packing Details: 3M or less (including 3M), 10 pieces / big bags; 3M-5M (containing 5M) 5 pieces / big bags; 7M-10M 3 pieces / big bags; 12M more than 1 box / big wterproof



TABLE

⑦	LABEL	LABEL: L:40 * W:15mm	1	
⑥	PE BAG	CLARITY PE BAG L:200 * W:90 * T:0.04mm.	1	
⑤	Mini Tie	PE Mini Tie, Color For Black L:140mm	1	
④	USB CABLE	USB 28AWG (7/0.12BC*1P)+28AWG (7/0.12BC*2C)+AB B=0.12mm/3*16 AL-MG JACKET:PVC/BLACK (BK01)OD:4.5mm Printing:A032 (BDC229)	1	
③	OUTER MOLD	Shore A 88 PVC, Color For Black.	2	
②	MINI5P CONNECTOR	USB MINI5PIN PIN GOLD.HASP NICKEL-PLATE	1	
①	USB A/M CONNECTOR	USB AM PIN GOLD.HASP NICKEL-PLATE	1	
NO.	PARTS NAME	SPECIFICATION STANDARD		
		QT' Y	REMARK	

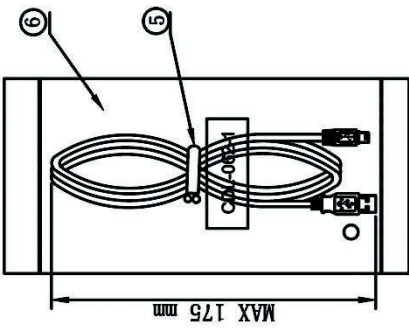

PACKING

DRAW NO.	ITEM NO.	USB AM TO MINI 5P		
CUSTOMER		Picture shows	Tolerance	
PRODUCT NAME			X. X ±1.00	
APPOBY	CHECKBY	DRAWNBY	X. X ±0.50	
		UNTT	MM	PAGE
				1/1